



02-028
40" LED LIGHT BAR
(HARNESS NOT INCLUDED)
INSTALLATION INSTRUCTIONS

INCLUDED:

LED Light bar
Mounting Bracket
Mounting Hardware

TOOLS NEEDED:

10mm Socket
10mm Wrench
Cordless Drill
1/4" Drill bit



LED light bar



Mounting Brackets

Madjax recommends professional installation. If you choose to not have this product installed by a professional, we highly recommend that you exercise caution, care, and patience when installing this product as it involves drilling holes into your cart's body.

***NOTE:** Mounting brackets are designed to fit across all major golf cart factory front struts. The brackets can be mounted either in or out depending on desired mounting location. 34" - 45" mounting area.*


1

Using a marking pen and tape measure, mark desired location on front struts. Using a 1/4" drill bit, drill a hole in each desired mounting location.



Attach brackets to struts using supplied 6x45mm hardware as shown and tighten.

2

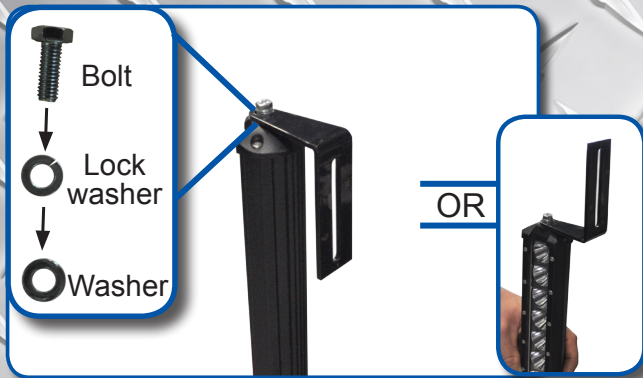

**Bracket can also be mounted reversed. If needed.*

Attach LED bar to brackets at mounting location using 6mm x 20mm bolts and tighten all hardware. To adjust light bar to your desired position, loosen 6mm x 20mm bolts and adjust.

*LED Bar can be mounted to the front of struts if desired.



See Harness instructions 02-029 for directions on how to install your LED Harness.

INSTALLATION COMPLETE

VISIT WWW.MYMADJAX.COM FOR MORE INSTALLATION VIDEOS.

Club Car®, Club Car® Precedent®, and Club Car® DS® are registered trademarks of Ingersoll Rand, Inc. ("Ingersoll Rand"). Reference to Club Car®, Club Car® Precedent®, or Club Car® DS® or any of Ingersoll Rand's trademarks, word marks, or products is only for purposes of identifying golf carts with which this Madjax product is compatible. Madjax products are aftermarket parts and are not original equipment parts. Madjax is not connected to, affiliated with, sponsored by, or endorsed by Ingersoll Rand or any of its subsidiary companies.

HARDWARE PACK

Pack 1

- 2 – 6mm x 20mm Hex Head Bolts
- 6 – 6mm flat washers
- 2 – 6mm lock washers
- 2 – 6mm x 45mm hex head bolts
- 2 – 6mm lock nuts

